

(19) World Intellectual Property
Organization
International Bureau



03 JUN 2005 537 531


(43) International Publication Date
1 July 2004 (01.07.2004)

PCT

(10) International Publication Number
WO 2004/055550 A1

- (51) International Patent Classification⁷: **G01T 1/24** (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (21) International Application Number:
PCT/US2003/039432
- (22) International Filing Date:
11 December 2003 (11.12.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/433,457 13 December 2002 (13.12.2002) US
- (71) Applicant (*for all designated States except US*): **OY AJAT, LTD.** [FI/US]; Tietotie 3, FIN-02150 (FI).
- (72) Inventors; and
- (75) Inventors/Applicants (*for US only*): **SPARTIOTIS, Konstantinos** [FI/FI]; Tietotie 3, FIN-02150 Espoo (FI). **MAN-NISTO, Olli** [FI/FI]; Tietotie 3, FIN-02150 Espoo (FI).
- (74) Agent: **PERNIA, Sherman, D.**; 1110 Nasa Road One, Suite 450, Houston, TX 77058 (US).
- (84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: SWITCHING/DEPOLARIZING POWER SUPPLY FOR A RADIATION IMAGING DEVICE

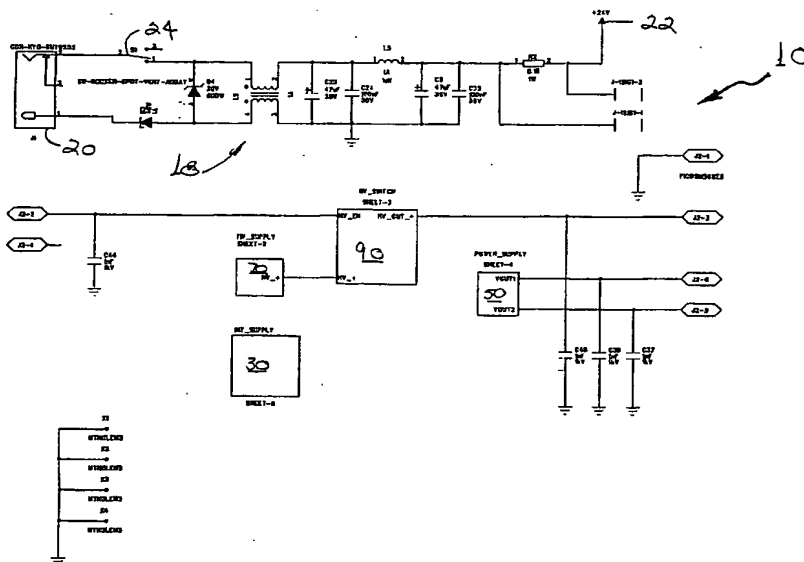

(57) Abstract: A high voltage switching power supply (10) for an X-ray/Gamma ray imaging camera provides high voltage switching and depolarization capabilities. The power supply includes a high voltage polarity switching and an image detector charge bleeding circuit (90) and is particularly useful with high energy radiation imaging cameras utilizing Cd-Te based detector substrates, especially substrates with blocked contacts, where charge accumulation in the detector material reduces imaging efficiency.

WO 2004/055550 A1

5

10

APPLICATION FOR UNITED STATES LETTERS PATENT

15

**SWITCHING/DEPOLARIZING POWER SUPPLY
FOR A RADIATION IMAGING DEVICE**

20

**Inventors:
Konstantinos Spartiotis, Ph.D.
Olli Männisto**

25

The present application claims the benefit of prior filed United States Provisional Application, serial number 60/433,457 filed 13 December 2003, to which the present application is a regular U.S. national patent application.

30

Field of the Invention

The present invention relates to the field of digital imaging of X-ray and gamma ray radiation. More specifically it relates to switching-type voltage power
5 supplies for digital X-ray and gamma ray imaging devices.

Background of the Invention

The present invention relates to a Dynamic Imaging Camera (DIC) or Scanning Camera (SCAN) having Cadmium-Telluride (Cd-Te, including Cd-Zn-Te) based radiation detectors for imaging X-ray signals. Cd-Te based detectors for imaging X-ray signals are known in the art, and are particularly useful for high energy radiation imaging. High energy radiation imaging include X-ray and gamma ray radiation in the 1.0 KeV and greater range. Typically, these detectors have a blocking contact on one face and pixel contacts on another face. In turn, the pixel contacts are bump-bonded to charge integrating application specific integrated circuits (ASICs). The blocking contact serves to reduce the dark or ambient current of the detector by a factor of 3 to 10. Lower dark currents mean higher sensitivity to incoming x-rays (signal).

However, a problem can exist in a Cd-Te detector having a blocking contact. Such contacts (e.g., Indium based blocking contacts) can polarize after a few seconds of operation, i.e., one to several hundreds of seconds. Polarization means that the detector starts to loose signal and the image loses definition or acuity and gets more blurry. Polarization happens due to gradual electric charge trapping inside the material bulk of the Cd-Te detector. Previously, one could not use a Cd-Te detector material in this X-ray imaging mode for more than a few seconds, due to the polarization effect.

Therefore, it would be useful in the field to have a means for preventing or overcoming the effect of electric charge trapping in high energy X-ray imaging systems utilizing Cd-Te based radiation detectors.

Summary of the Invention

5 A Cadmium-Telluride (Cd-Te) based DIC detector typically requires a high voltage (HV) bias potential to operate properly. Unfortunately, such detectors can quickly accumulate an electrical charge and become polarized. The polarization charge offsets the HV bias potential and adversely affects operation and image quality of the camera imaging device. Once it becomes polarized, the detector unit requires a "refresh" action, i.e., the bleeding-off of the trapped or accumulated electric charge to depolarize the detector unit and restore operational efficiency of the device.

10 The present invention is a high voltage (HV) switching power supply for use with a high energy X-ray camera imaging device with a Cd-Te based detector (including a CdZnTe based detector). Such X-ray imaging cameras typically comprise a detector substrate bonded to a CMOS substrate and mounted to an interface/signal processing board, in combination with a power supply. The output from the camera is typically communicated to a computer for image processing. The depolarizing, switching HV power supply of the present invention is intended as a power supply for such an X-ray imaging camera.

20 The present HV switching power supply enables the use of Cd-Te detectors (especially those having blocking contacts) in dynamic imaging camera X-ray imaging systems and scanning camera/sensor imaging systems. The HV power supply is used to supply HV to the Cd-Te detector of the X-ray imaging system. The HV output of the HV power supply is switchable (on/off) at user defined intervals. For example, every few seconds the HV output of the switching power supply automatically cycles off for a few milliseconds and then very fast on again. When the HV output goes off, any electrical charge trapped at the detector(s) is

able to bleed-off, which reverses or prevents polarization of the detector. This prevents the accumulation of electric charge and polarization of a Cd-Te detector having a blocking contact. The prevention of polarization allows continuous usage of a Cd-Te type detector DIC imaging device, and enables the use of such devices
5 for inline imaging, e.g., in non-destructive testing or automated X-ray inspection systems.

The present depolarizing, HV switching power supply provides both high and low voltages useful for powering a Cd-Te base radiation detector, with or
10 without a blocking contact. Typical low and high voltage requirements for Cd-Te base radiation detectors are known in the art. For example, low bias voltage requirements for the Cd-Te type detectors are on the order of +/-1.0V to +/-15.0V DC to operate the detector's internal circuits. The present HV switching power supply also provides an adjustable high bias voltage from +80VDC to +450VDC
15 for driving the detector.

By using the present power supply that switches on/off the High Voltage as described herein, a plurality of dynamic imaging applications utilizing CdTe or CdZnTe detectors becomes possible. The applicant has developed already
20 cameras that operate at 50frames per second, 100fps or even 400fps. These cameras operate smoothly over many hours or indeed days without a need to manually refresh the detectors (by manually powering off, waiting and then switching the HV on again). The smooth, stable and uninterrupted operation in X-ray imaging applications is essential. Example applications where such DIC or
25 SCAN cameras can be used included but are not limited to non destructive testing, inline inspection, automatic X-ray inspection, dental panoramic imaging, Computerized Tomography etc.

5 Additionally, while it was emphasized that the current invention is mostly suitable for CdTe or CdZnTe based detectors with a blocking contact, it can also have application in CdTe or CdZnTe detectors without blocking contact, but equipped with Platinum (Pt), Gold (Au) or other conventional contacts. Even such conventional contacts can create polarization after many minutes or hours and a power HV supply as described herein is ideal for the smooth and stable operation over many hours or indeed days.

Brief Description of the Drawings

Figures 1 to 5 are schematic representations illustrating the present depolarizing/switching power supply and component circuits.

5

Figure 6 (rising slope) displays the ramp-up and ramp-down waveforms of an actual Cd-Te semiconductor detector substrate where condition of the present HV power supply were: Ch1: HV_EN = 5V, 50 μ sec/div.; Ch2: Detector Voltage, 100v/div.

10

Figure 7 (falling slope) displays the ramp-up and ramp-down waveforms of an actual Cd-Te semiconductor detector substrate where condition of the present HV power supply were: Ch1: HV_EN = 5V, 50 μ sec/div.; Ch2: Detector Voltage, 100v/div.

15

Figure 8 (rising slope) demonstrates the flat slope produced by a pure capacitive load and the power supply current limiter, where: Ch1 = HV_EN, and Ch2 = Capacitor Voltage, 100 μ sec, 100v/Div.

20

Figure 9 (falling slope) demonstrates the flat slope produced by a pure capacitive load and the power supply current limiter, where: Ch1 = HV_EN, and Ch2 = Capacitor Voltage, 100 μ sec, 100v/Div.

25

Detailed Description of the Invention

Referring now to the drawings, the details of preferred embodiments of the present invention are graphically and schematically illustrated. Like elements in the drawings are represented by like numbers, and any similar elements are represented by like numbers with a different lower case letter suffix.

Fig.1 generally illustrates the present depolarizing/switching power supply 10 of the present invention. In a preferred embodiment exemplified in Fig. 1, the present invention was externally supplied with +24V DC from a medical grade external power source (not shown). Of course, an alternative such a power source of an appropriate supply voltage is known to and selectable by one of ordinary skill in the art for practice in the present invention, either internally or externally. In this embodiment, the supply power requirement for the present switching power supply was on the order of about 10W.

As illustrated in Fig.1, the present HV switching power supply 10 comprised the combination of five main circuits: a control/conditioning circuit 18, an internal power supply 30, a low voltage power supply 50, a high voltage power supply 70, and a high voltage switch 90. The conditioning/control circuit 18 has an external power source connection 20 and included a main power on/off switch 24. The conditioning circuit 18 conditions the external power appropriately for use by the other circuits of the power supply 10. A main operating voltage power connection 22 communicates the conditioned electrical power to the other circuits of the power supply 10. Preferably, the present HV switching power supply 10 is electrically shielded, as is accomplishable by one of ordinary skill in the art. In a preferred embodiment, the switching power supply was housed in a metal casing (not shown), which casing was connected to a power supply ground J2-1 to

attenuate or eliminate electromagnetic interference (EMI). Generally, the connectors utilized in the power supply are protected from electrostatic discharge (ESD) and filtered for EMI, and the DC voltage connections are protected from reverse polarity and voltage spikes. Additionally, the high voltage enable signal circuit is protected from over voltages and has a pull-down feature. The know-how to accomplish such protections in the present invention are known to and practicable by the ordinary skilled artisan. Preferably, shielded cable is utilized for current carrying conductors and coaxial cable for bias voltage conductors.

Fig. 2 is a schematic diagram of a preferred embodiment of an internal power supply circuit (**int_supply**) 30 practiced in the present HV switching power supply 10: The internal power supply 30 provides low voltage power as required for the other circuits of the present switching power supply 10. The internal power supply 30 comprises a linear regulator (N5) 32 and linear regulator circuit 34 adjusted to provide a +12V DC output 46. An LM317 integrated circuit was utilized as the linear regulator 32 of the linear regulator circuit 34. The internal power supply 30 also comprises a switching regulator (N1) 38 and switching regulator circuit 40. The switching regulator circuit 40 provide the low negative voltage (e.g., -5V DC in the embodiment illustrated) as required in the other circuits of the HV switching power supply 10 at the negative bias voltage output 42. A National LM2672 integrated circuit 260kHz switching regulator in buck-boost configuration was utilized as the switching regulator 38. A minimum drain for the negative bias voltage output 42 was provided by an LED 44.

Fig. 3 is a schematic diagram of a preferred embodiment of a low DC voltage power supply circuit (**power_supply**) 50 practiced in the present HV switching power supply 10. The power supply circuit 50 provides low DC voltages for operating external devices, like the detector unit(s), connected to the

power supply 10. In the exemplified preferred embodiment, the power supply circuit 50 comprised two switching regulator circuits 52 & 53 to provide +6.7V and +5V respectively to operate detector elements. National LM2672s regulators 56 were used in the switching regulator circuits 52 & 53 to respectively provide a +6.7v output (**Vout1**) 58 and a +5V output (**Vout2**) 60. The LM2672s regulators 56 of both switching regulator circuits 52 & 53 were disposed in buck configuration. In this preferred embodiment, the +5V switching regulator circuit 53 had a green SMD LED 62 and the +6.7V switching regulator circuit 52 had a yellow angled LED 63 to differentiate and indicate the low voltage power supply 50 was turned on.

Fig. 4 is a schematic diagram of a preferred embodiment of a high voltage, switching power supply circuit (**HV_supply**) 70 of the present depolarizing/switching power supply 10. The HV power supply circuit 70 provides a high voltage bias output 72 to the high voltage switch circuit 90 (see Fig. 5). In the preferred embodiment shown, the HV switching power supply circuit 70 used a standard UC3842 current-mode PWM controller 76 operating in a boost configuration at about 75 kHz. A voltage feedback loop was used to adjust the voltage at high voltage bias output 72 to the desired level (about +350V in the present embodiment). The current feedback protected the switching power supply circuit 70 from short circuits and provided good transient response, improving HV bias rise time.

The voltage division utilized in the voltage feedback loop of the HV power supply circuit 70 was heavy and yielded a ripple voltage of 1-2Vpp without compensation. A compensation circuit synchronized to the UC3842's oscillator circuit added an artificial ramp onto each current pulse. The compensation ensures the power supply did not skip pulses, and limited the voltage ripple to about

200mVpp. A constant current load was used to provide about a 1.0 mA current drain for the power supply independent of the output voltage.

5 Fig. 5 is a schematic diagram of a preferred embodiment of a high voltage switching circuit (HV_switch) 90 practicable in the present HV depolarizing power supply 10. As shown in Fig. 5, the HV switching circuit 90 provides a high bias voltage at its HV voltage output 92 in response to the presence of an active high voltage enable signal at its signal input (HV-EN) 94.

10 However, when the high voltage enable signal at the signal input 94 is inactive or disabled, the HV switching circuit 90 provides a -5V DC bias at its voltage output 92. Additionally, when the high voltage enable signal at the signal input 94 goes inactive or is disabled, an FET sub-circuit in the HV_switch 90 is cuts off the high voltage bias voltage. When the high voltage bias voltage is cutoff, the bias voltage at the HV voltage output 92 is pulled down to -5V, causing
15 a reversal of the biasing current in the Cadmium-Telluride photo-conductor material. Reversing the biasing current in the photo-conductor material bleeds off the trapped electrical charge and de-polarizes the detector unit.

20 The Q5 FET 100 is connected in series with the HV bias. It has a pull-up to the HV bias, resulting in an output of HV-Vgs in the steady-state. During the ramp-up, current flowing through resistor 102 causes a voltage differential. The Q7 transistor 104 pulls the FET gate 100 closed when the set current limit is exceeded. This results in a triangular waveform for the HV bias voltage.

25 The Q3 FET 106 pulls the Q5 FET gate 100 down to -5V when open. This closes Q5 FET 100 and reverses the bias voltage. Q3 FET 106 has a similar current-limiter circuit as Q5 FET 100, resulting in a linear down slope. Opening and closing Q3 FET 106 enables controlling the bias voltage. The voltage of the Q3 FET gate 106 is controlled by the high voltage enable signal at the signal input

94. When the high voltage enable signal at the signal input 94 is active (enabled or "pulled high"), an indicator LED 110 was lit.

5 The high voltage switching circuit 90 can be operated at a much higher switching frequency than in the illustrated embodiment. There is about a 50 μ sec initial delay between low-to-high bias voltage transition and the beginning of the HV bias voltage ramp. The delay is likely caused by the large resistors used in pull-up circuit and the FET gate capacitance. Modification of the characteristics of these components could lessen the delay. It was intended in the present
10 embodiment that the imaging system operate at about 50 frames per second, thus enabling dynamic imaging, the X-raying of moving objects.

HV bias voltage rise and fall time are determined by the bias voltage current limiter (see Fig. 5) and the capacitance of the DIC detector unit.
15 Approximate state change time (t) is given by:

$$t = (350V * C)/5mA$$

About 6-7% of the decay/growth time (t) is not current limited. Load resistance seen by the detector capacitance (C) was not known. An accurate result could be measured separately for each detector and power supply 10 combination. An
20 approximated result has to be multiplied to estimate when the HV bias voltage has settled within 1% of steady state. See Fig. 6.

Figures 6 - 9 display the ramp-up and ramp-down waveforms of an actual Cd-Te semiconductor detector unit. The unit under testing had four 1cm². A DIC
25 100 has a 25 cm² area. The falling slope exhibits undershoot, which appears to originate from the Cd-Te detector unit. The undershoot amplitude is limited by the power supply 10 current limiter of the HV switch 90. The illustrated signal is almost a perfect 5mA current-limited slope until the undershoot peaks.

Rise time is about 200 μ sec, fall time is about 250 μ sec. However, the detector takes several milliseconds to stabilize after the state change. Therefore, the ability of the power supply to ramp the high voltage is not the limiting factor in the depolarization process. The figures demonstrate the flat slope produced by a pure capacitive load and the power supply current limiter. The undershoot exhibited by the falling slope of the Cd-Te detector unit is not present with a capacitive load.

While the above description contains many specifics, these should not be construed as limitations on the scope of the invention, but rather as exemplifications of one or another preferred embodiment thereof. Many other variations are possible, which would be obvious to one skilled in the art. Accordingly, the scope of the invention should be determined by the scope of the appended claims and their equivalents, and not just by the embodiments.

WHAT IS CLAIMED IS:

Claims

1. A high energy X-ray imaging system comprising:
a Cadmium-Telluride based radiation detector unit in a high energy
imaging camera; and
a depolarizing, switching high voltage power supply 10 with electric charge
bleeding means, the power supply 10 in electrical communication with the
radiation detector unit.
2. The high energy imaging system of claim 1, wherein the depolarizing
power supply 10 comprises:
an external power conditioning circuit 18 connected to an external power
source 20 and providing a main operating voltage power connection 22 for
communicating conditioned electrical power to other circuits of the power
supply 10;
an internal power supply 30, in electrical communication with the operating
power connection 22, providing low positive and negative voltage power
as required for the other circuits of the switching power supply 10;
a low voltage power supply circuit 50, in electrical communication with the
operating power connection 22, generates and provides low DC voltages
for operating the detector unit;
a high voltage power supply 70, in electrical communication with the
operating power connection 22, generating and providing a high bias
voltage at a high voltage bias output 72 for communication to the high
voltage switch circuit 90; and
a high voltage switch 90, in electrical communication with the operating
power connection 22, the high voltage switch 90 being a fast-on/fast-off
switch, and alternately providing a high DC voltage bias and low opposite

polarity DC bleed voltage at a HV switch output 92 in response to the presence of an appropriate signal at a signal input 94, wherein the low opposite polarity DC bleed voltage at the HV switch output 92 comprises the bleed means for depolarizing the detector unit.

5

3. The high energy imaging system of claim 2, wherein the high voltage switch 90 alternately provides a high positive DC voltage bias and low negative DC bleed voltage at the HV switch output 92 in response to the presence of a signal at the signal input 94.

10




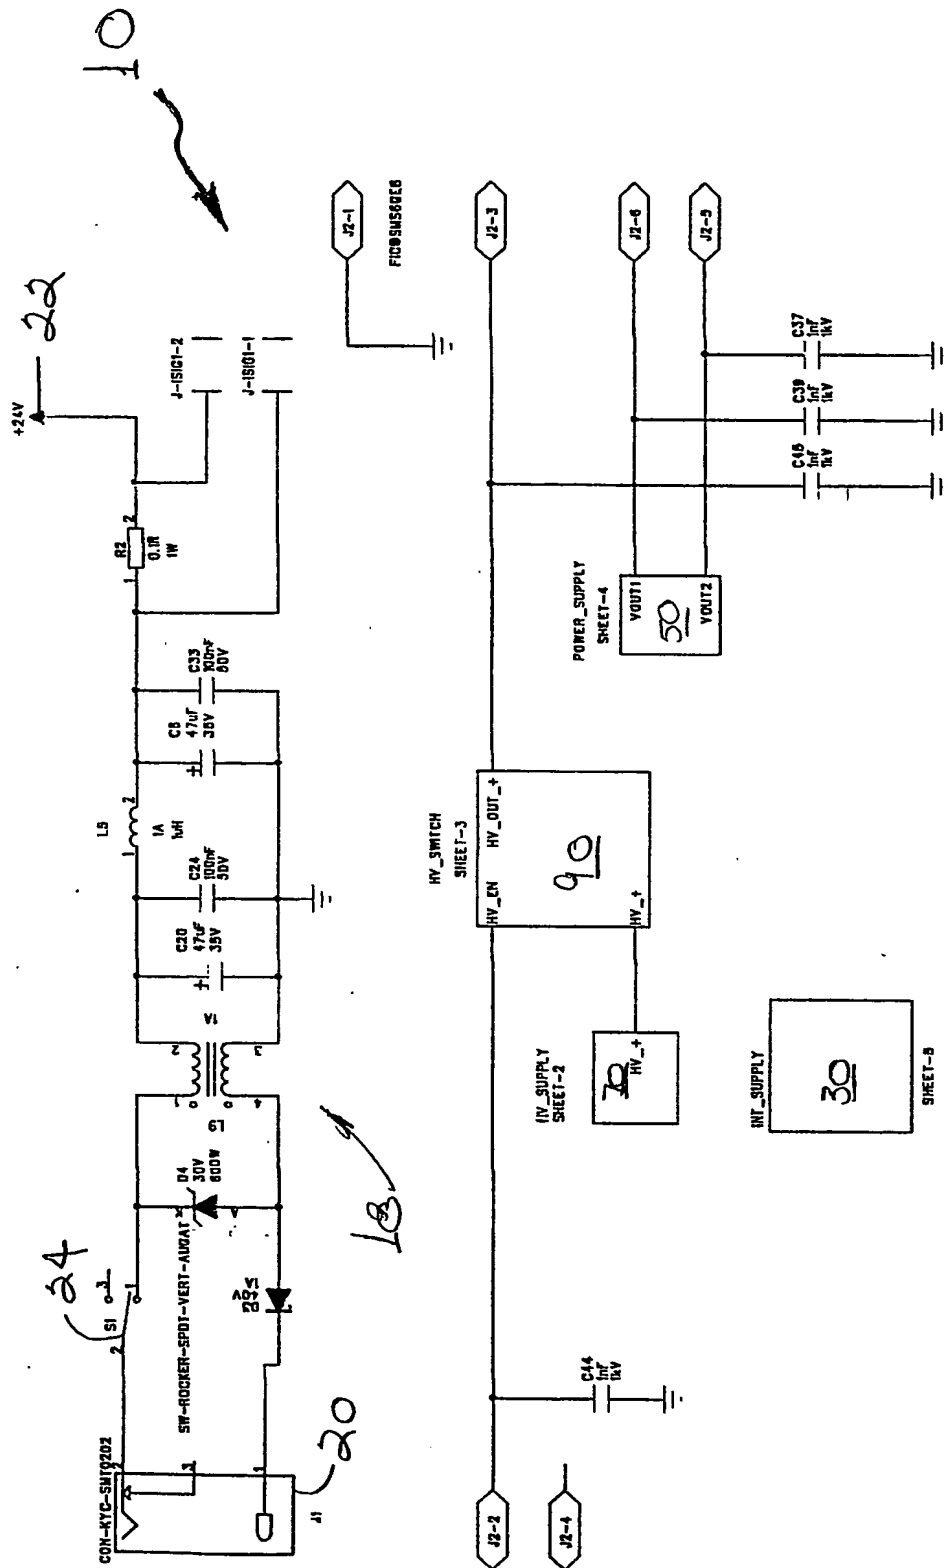


Fig. 1

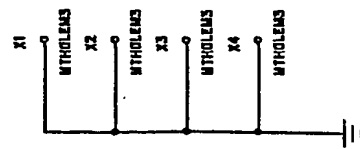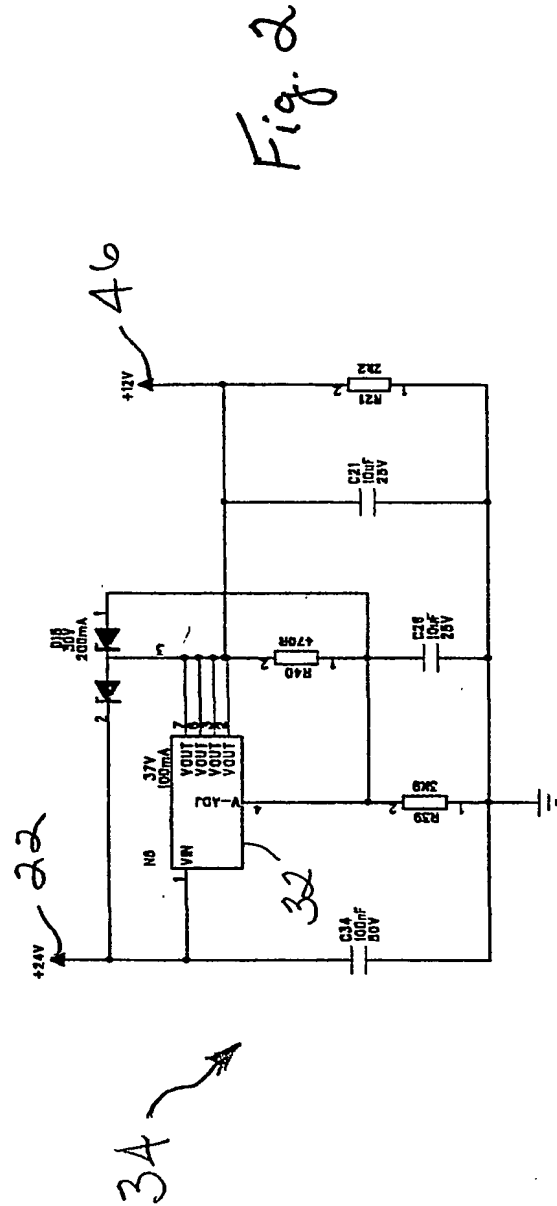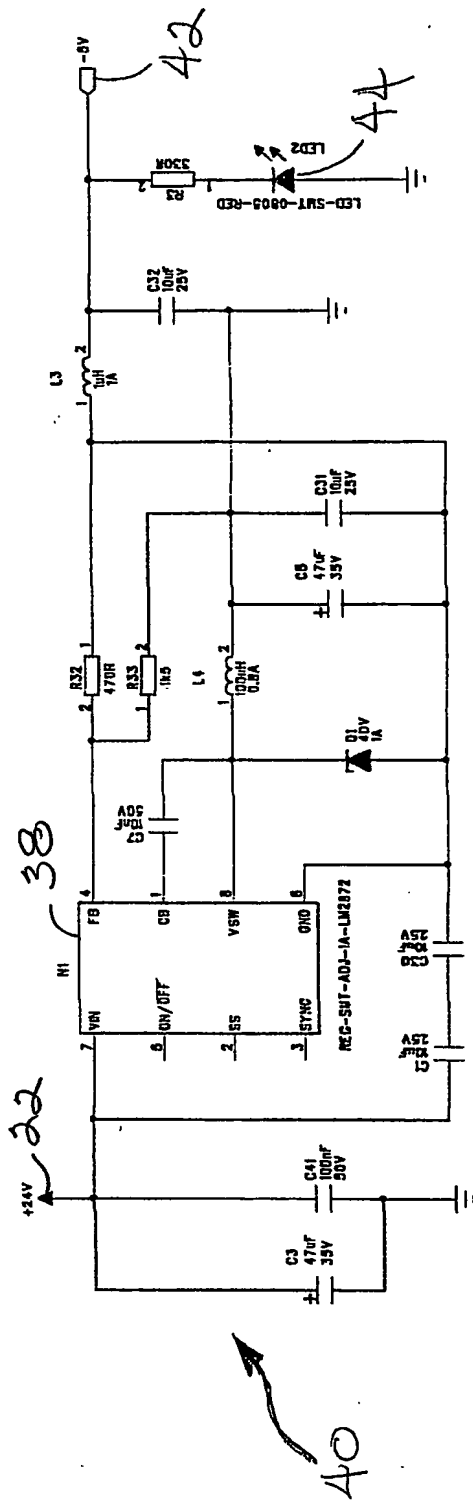

2/7



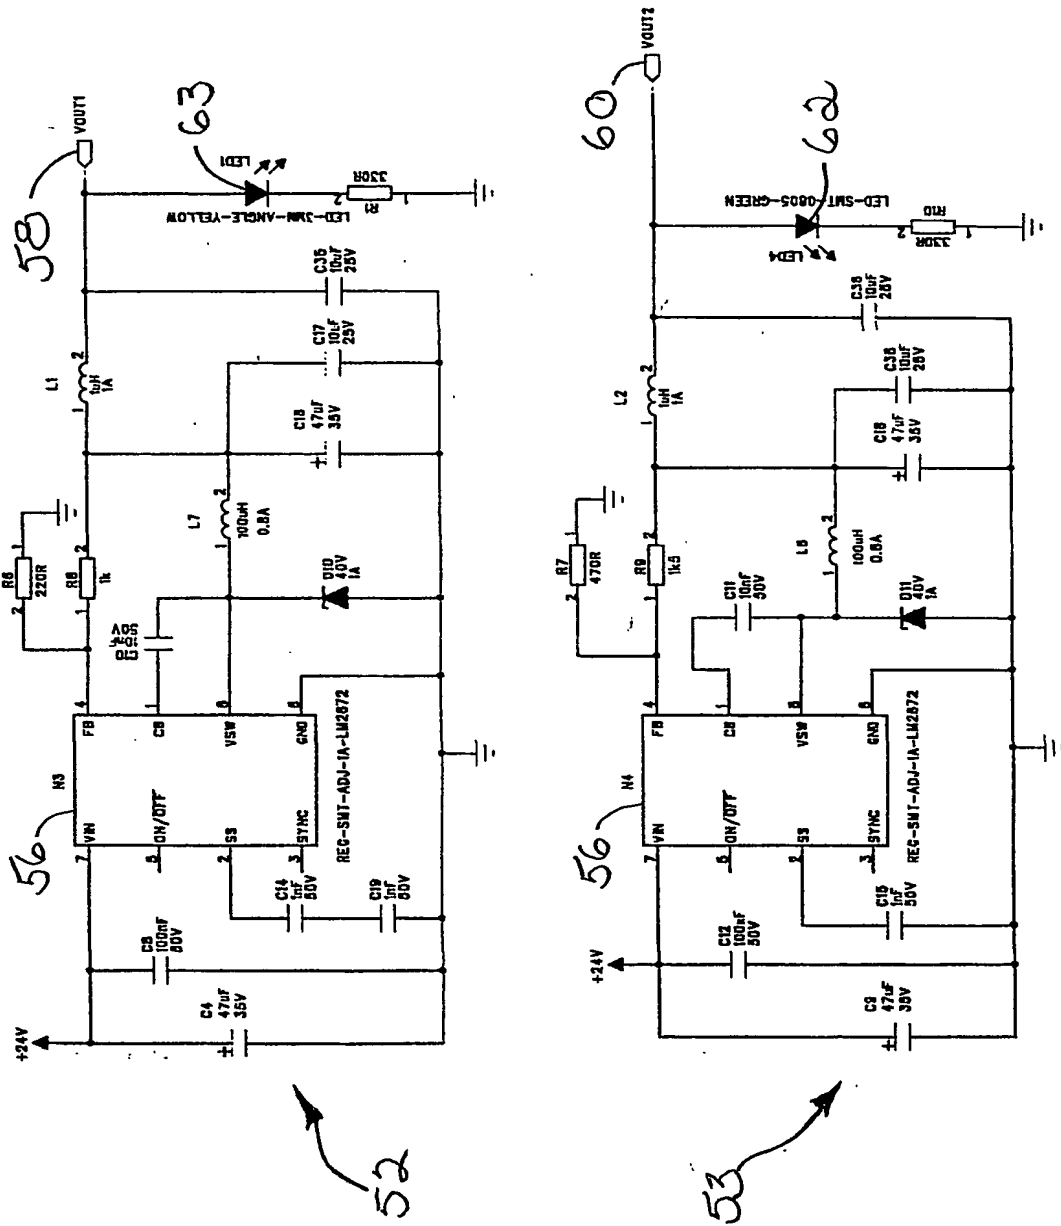


Fig. 3

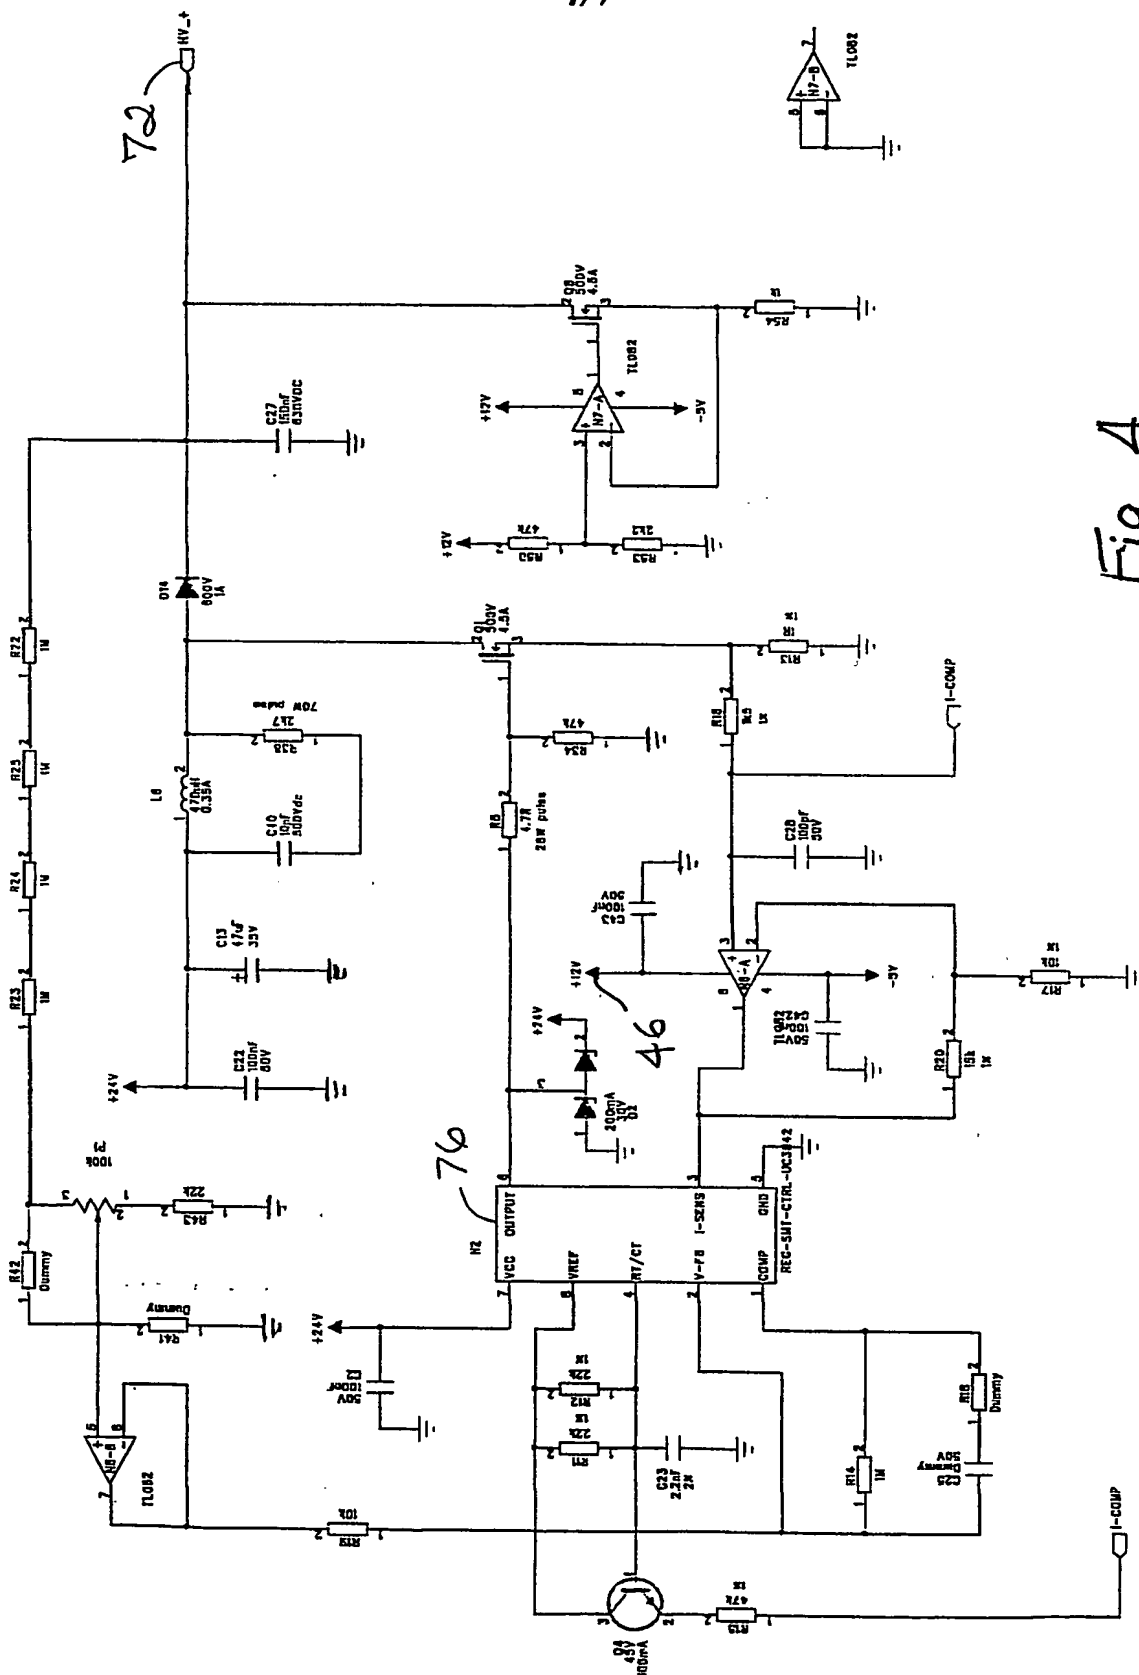


Fig. 4

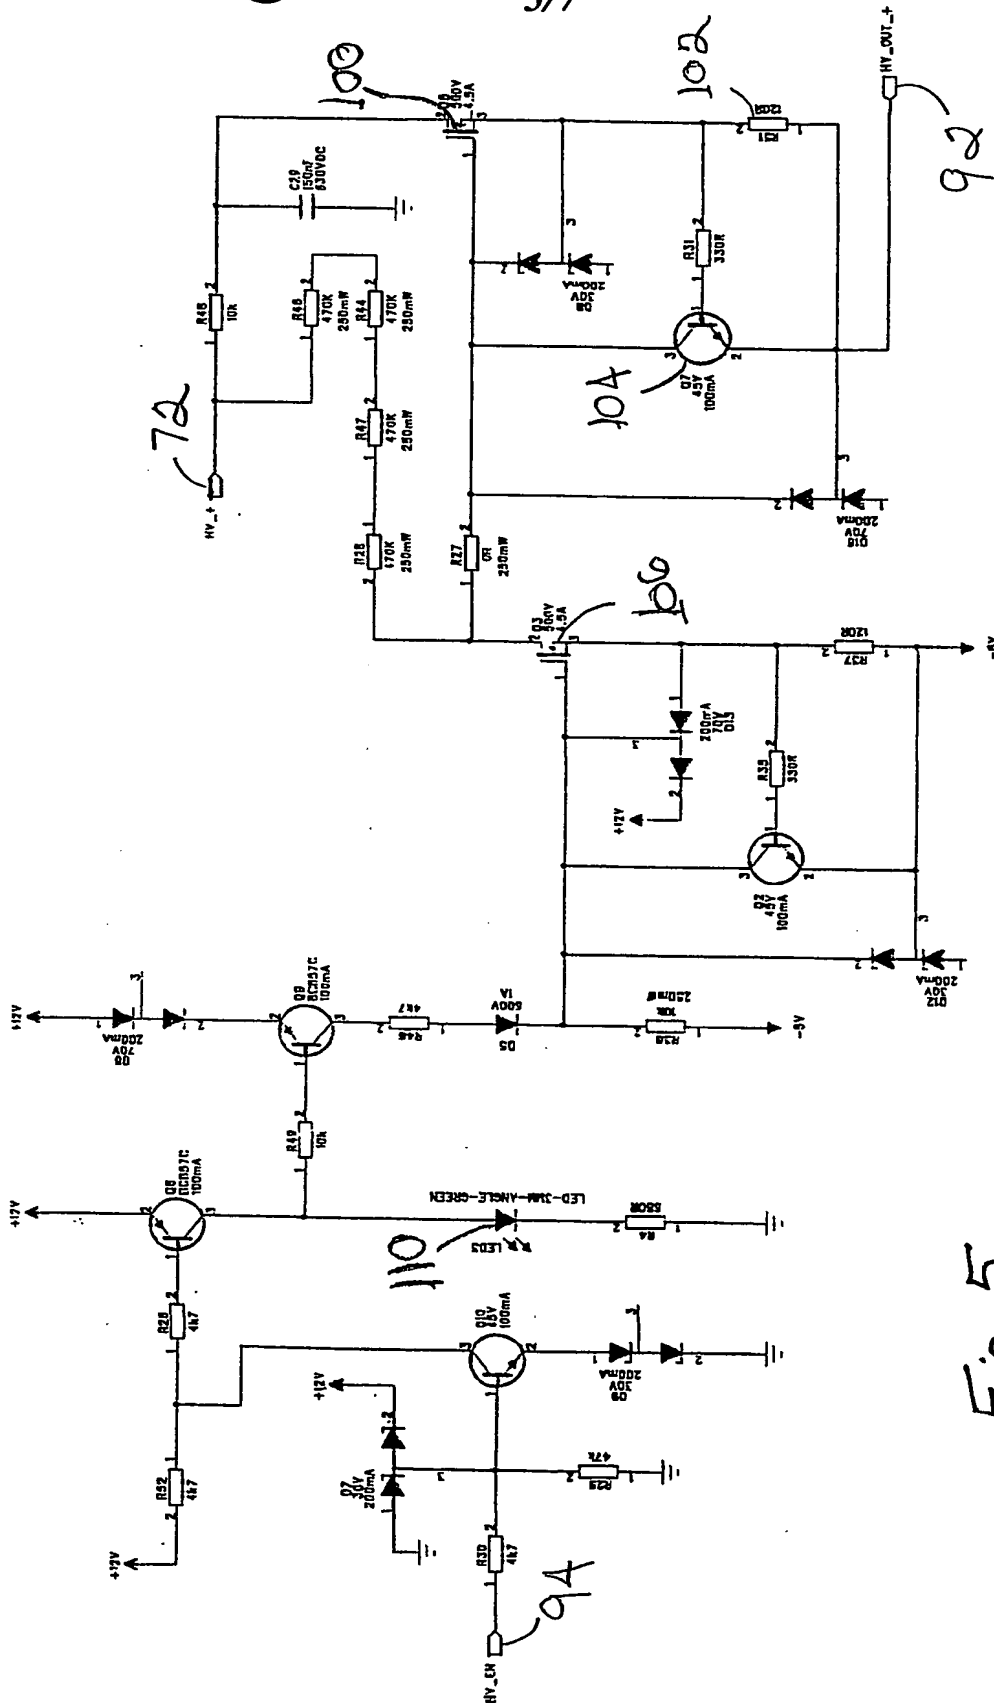


Fig. 5

6/7

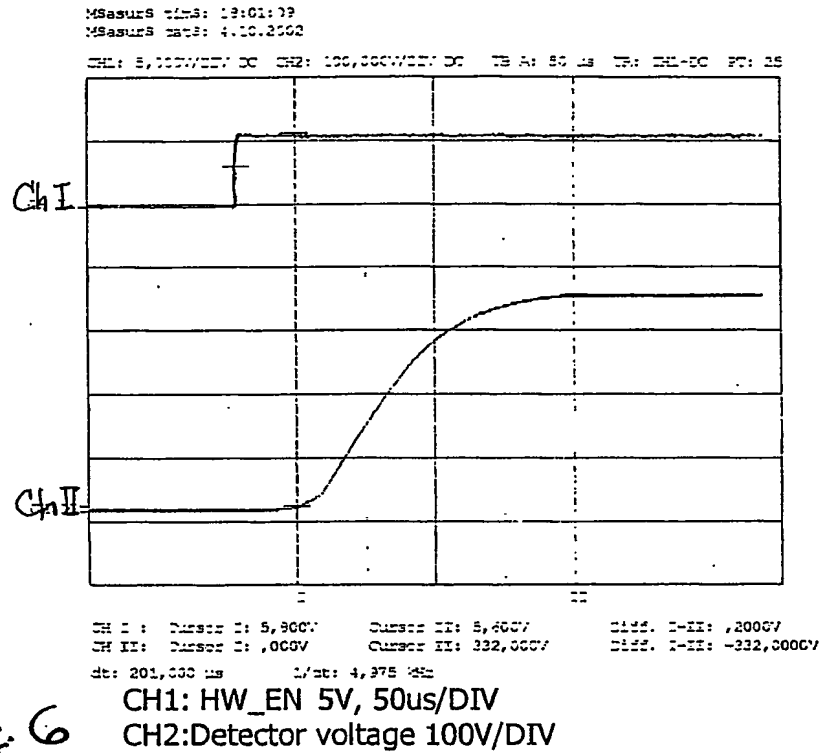


Fig. 6

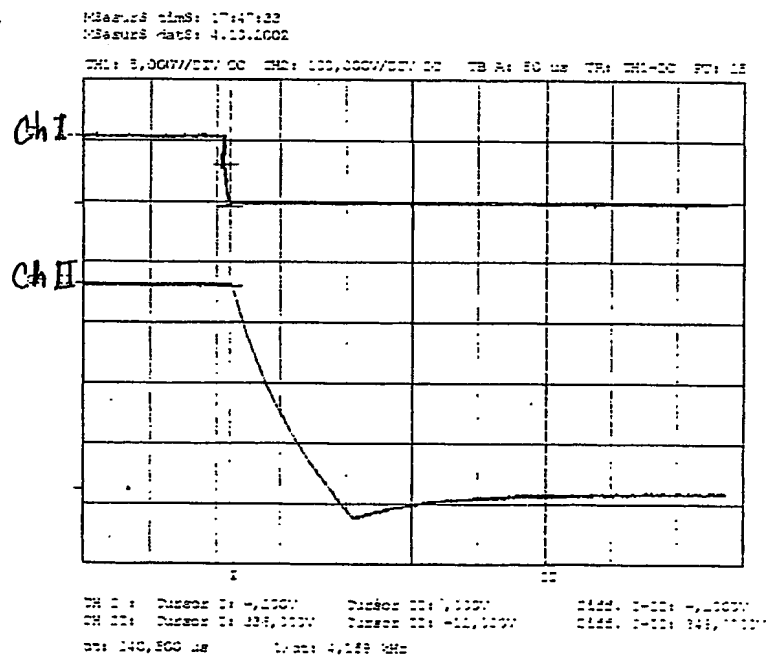


Fig. 7

7/7

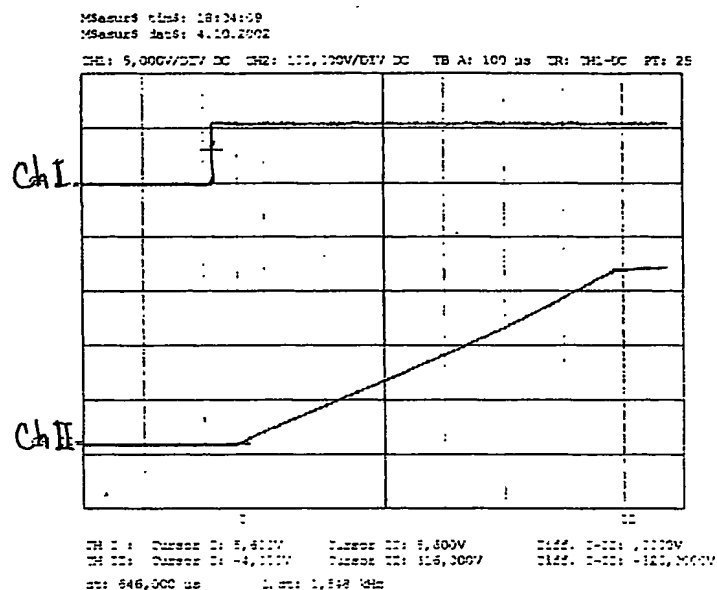


Fig. 8 CH1:HV_EN
CH2:Capacitor voltage 100uS, 100V/DIV

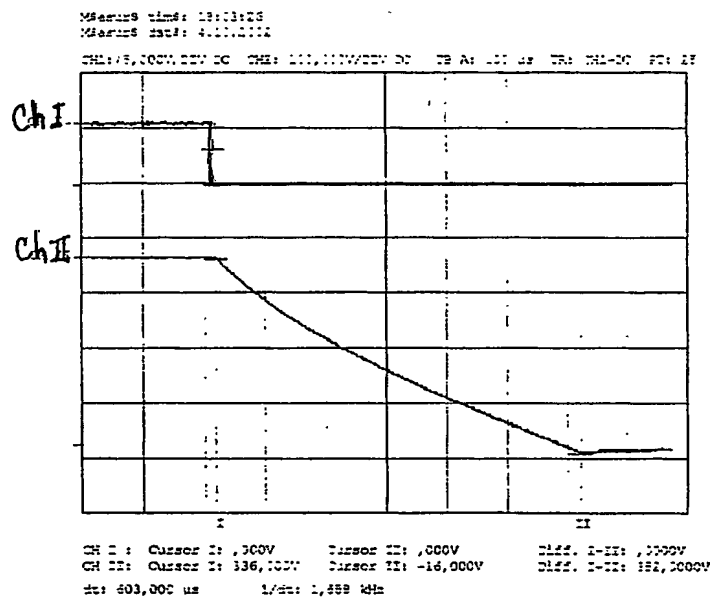


Fig. 9 CH1: HV_EN
CH2:Capacitor voltage 100uS, 100V/DIV

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US03/39432

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : G01T 1/24

US CL : 250/370.13

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 250/370.13

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
NONE

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
Please See Continuation Sheet

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4,255,659 A (KAUFMAN et al) 10 March 1981 (10.03.1981), see entire document.	1-3
A	US 4,133,025 A (WURZBURG) 02 January 1979 (02.01.1979), see entire document.	1-3

☐ Further documents are listed in the continuation of Box C.

☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T"

later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X"

document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y"

document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&"

document member of the same patent family

Date of the actual completion of the international search

23 March 2004 (23.03.2004)

Date of mailing of the international search report

14 APR 2004

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US
Commissioner for Patents
P.O. Box 1450
Alexandria, Virginia 22313-1450

Facsimile No. (703) 305-3230

Authorized officer

Constantine Hannaher

Telephone No. (571) 272-2437

Renner

INTERNATIONAL SEARCH REPORT

PCT/US 32

Continuation of B. FIELDS SEARCHED Item 3:

USPTO EAST BRS; DIALOG DATASTAR; IEEE XPLORE

search terms: cdte hgcdte cdznte cadmium telluride blocking contact power supply polarity switch charge bleed polariz\$5 depolariz\$5 x ray; cadmium telluride power supply polarization blocking contact; cadmium telluride supply switch power